


AUTOMATED PROCESSES, INC.
80 MARCUS DRIVE, MELVILLE, NEW YORK 11746 · 516-694-9212




AUDIO TRANSFORMERS

MODEL NO.	APPLICATION	PRIMARY IMPEDANCE	SECONDARY IMPEDANCE	FREQUENCY RESPONSE	MAXIMUM LEVEL	NOTES
AP2164	Input (Bridging)	10,000 Ω	600 Ω	20 to 30kHz $\pm 0.3\text{dB}$	+20dBm	
AP2503-1 AP2503-2	Output (Amplifier to Line)	75 Ω	75 Ω (1:1)* 300 Ω (1:2)* 600 Ω (1:3)*	30 to 20kHz $\pm 0.5\text{dB}$	+30dBm	Electrically identical, transformers differ only in mechanical details
AP2622	Input (Mic Preamp)	150/600 Ω	10,000 Ω	30 to 20kHz $\pm 0.5\text{dB}$	0dBm	
AP2623-1 AP2623-2 AP2623-3 AP2623-4	Output (Amplifier to Line)	75 Ω	75 Ω (1:1)* 300 Ω (1:2)*	30 to 20kHz $\pm 0.5\text{dB}$	+30dBm	Electrically identical, transformers differ only in mechanical details


*Minimum Load Impedances

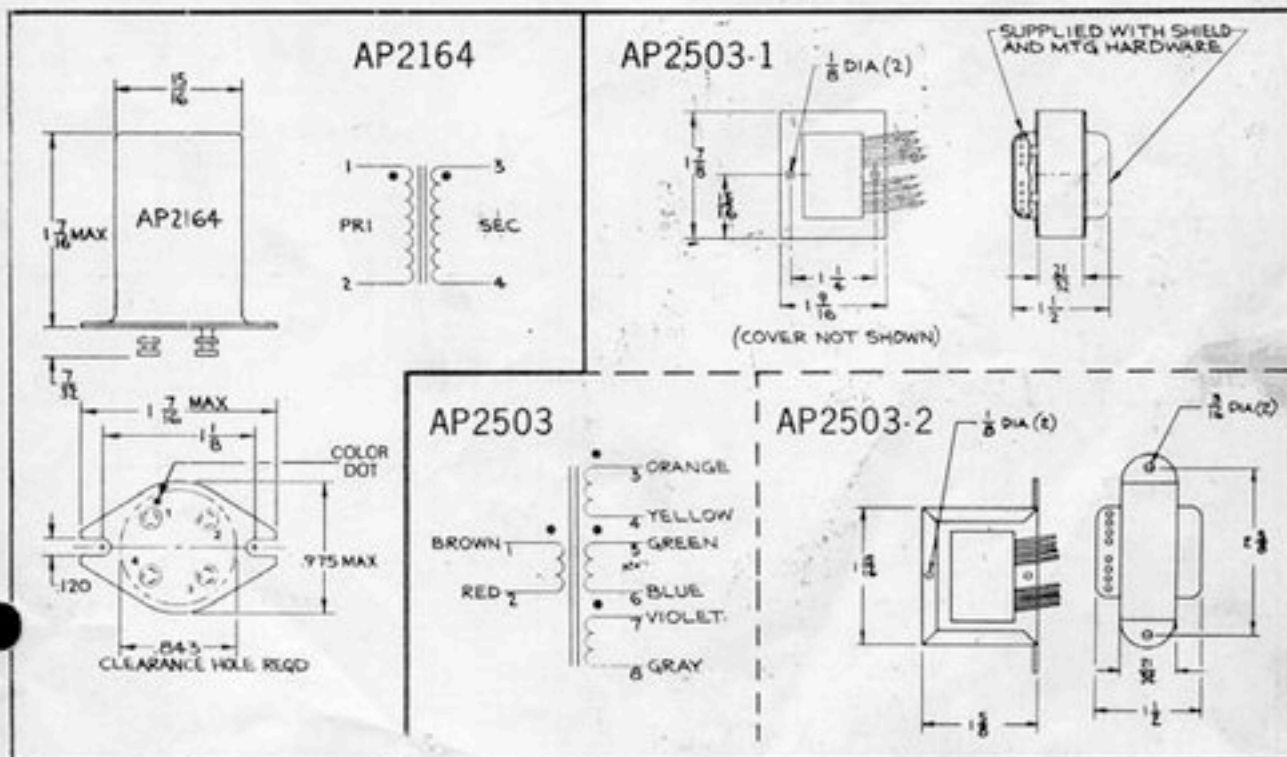


AP2622

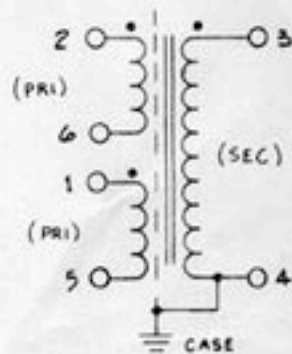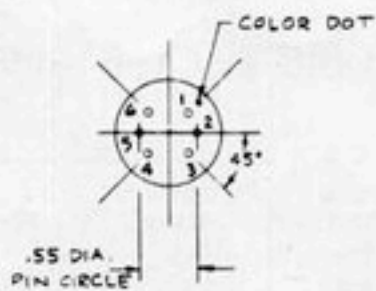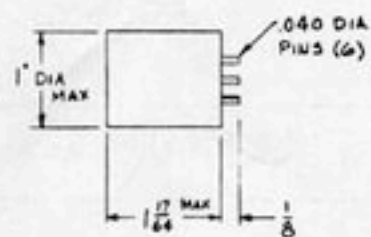



AP2623-1

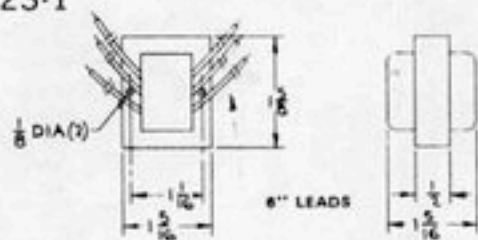


AP2623-3



AP2623-2

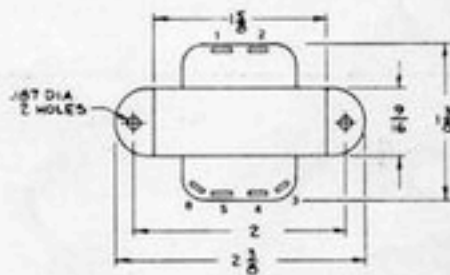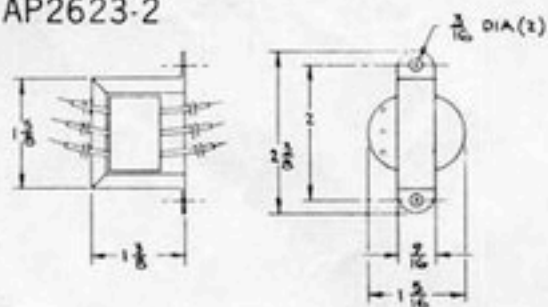

AP2623

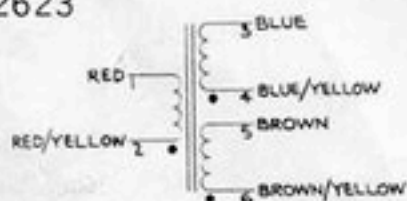

AP2623-4

