




**Materials: all materials are UL94V-0 rated**

Bobbin and box material: FR530  
 UL file number: E69578(M)  
 or 'Polyplastics Co. Ltd  
 Material name: 1140 A(C)  
 UL file no. E109088(M)  
 2-part epoxy resin type 3300A and 3300B  
 UL file number 218090  
 or Epoxylite EIP4728: UL file no. E143115  
 Core: class B (49% Ni) EE laminations  
 Winding wire: ECW. UL file no. E174837  
 Tape: 3M No. 56 polyester or equivalent


**Electrical characteristics:**

Impedance:  
 Primary: 600 + 600 ohms per winding  
 Secondary: 600 + 600 ohms per winding  
 Series connected: 2.4k ohms C.T. to 2.4k ohms C.T.  
 DC resistance (ohms +/- 15%): 42+42 & 58+58  
Inductance, measured at 1kHz, 0.27V  
 Primary: 500mH min. + 500mH min.  
 Secondary: 500mH min.+ 500mH min.  
Frequency range: 30Hz - 35kHz +/- 1.5dB.  
Power: 100mW @ 300Hz,  
 2.5mW @ 50Hz, 1mW @ 30Hz,  
Distortion: less than 1% T.H.D. (600 ohms).  
 30Hz - 35kHz measured at 0dBm  
Proof voltage, primary to secondary: 1kV DC

Operating temperature range: 0 - 70°C

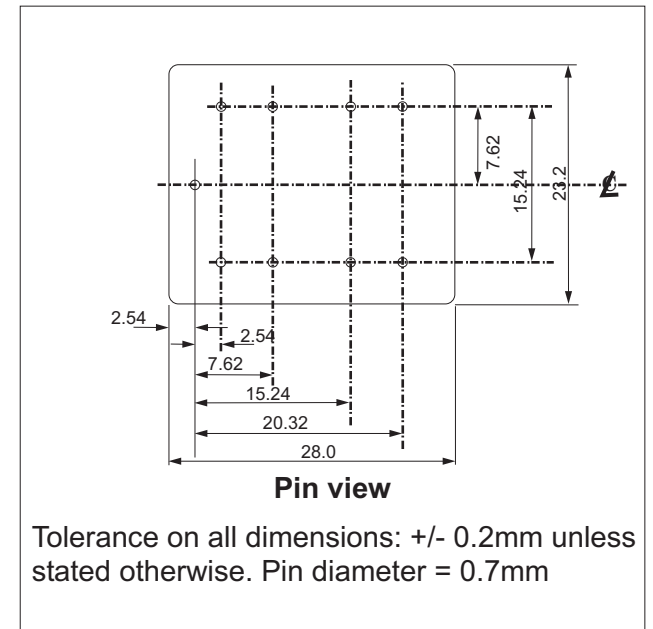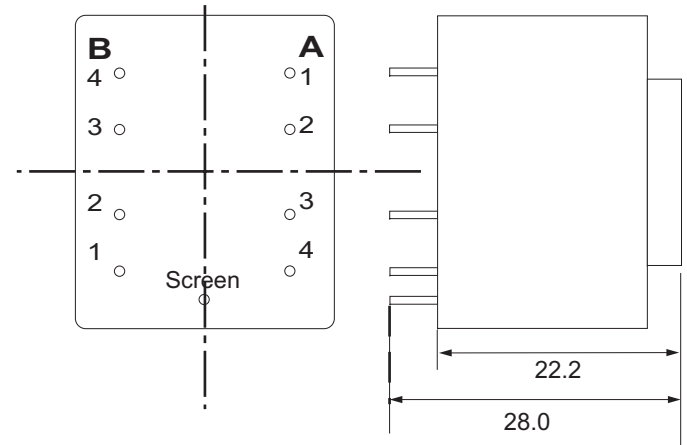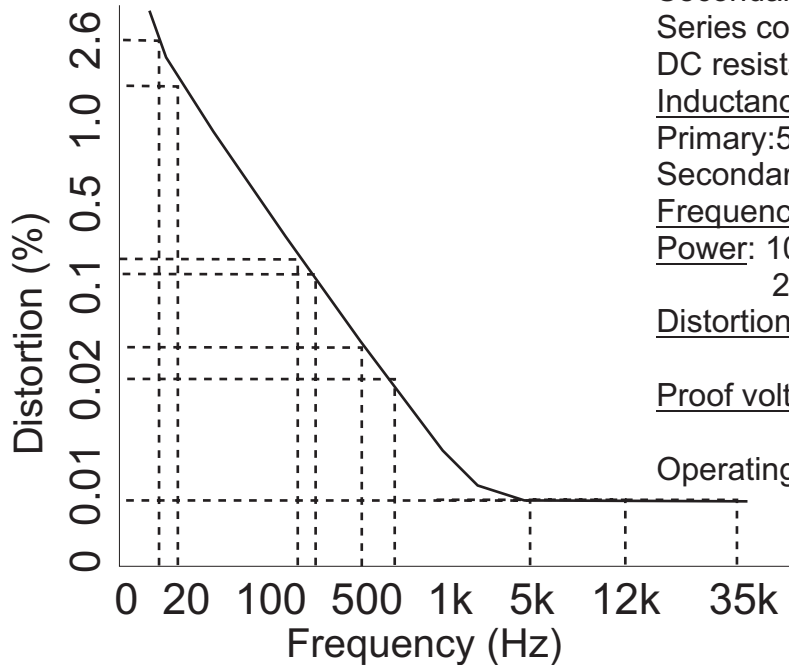

Tolerance on all dimensions: +/- 0.2mm unless stated otherwise. Pin diameter = 0.7mm



**OXFORD ELECTRICAL PRODUCTS Ltd.**  
 15 - 17 Industrial Estate, Wroslyn Road  
 Freeland, Witney, Oxon. OX29 8SN  
 Tel: (01993) 886200 Fax: (01993) 886210  
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A7E	1	17/09/02	CS		<b>A262A7E</b>
	2	28/10/02	CS		
	3	04/05/04	CS		
	4	13/06/05	CS		

Scale: 2 to 1

All dimensions in mm unless stated otherwise